

MIPAR™

Network License Activation Instructions

SERVER SIDE

If you **HAVE** installed MIPAR on this system, follow the [MIPAR Local Activation Instructions](#), close MIPAR, and then skip to step 3 of this document. Otherwise, begin with step 1.

1 Start License Manager

- Download and extract the “**MIPAR_Network_LicensePack.zip**” archive (a link is provided in your product key delivery email)
- Double-click on “**Start License Manager.bat**”, or launch an administrative command prompt, navigate to the extracted archive’s “**.For_LicenseManager**” directory, and enter the command “**haspdinst -i**”.

2 Activate License



Generate system fingerprint

- Go to your [Key Management Page](#)
- Click the **C2V** button in the empty row to download your fingerprint C2V file




Download license key

- If necessary, go to a computer that has internet access
- Go to the [License Key Download Page](#)
- Enter your emailed **Product Key** – click **Login**
- Click **Offline Activation** in the top right corner
- Click the “...” button next to “**Upload C2V**”
- Choose the C2V file you generated above
- Click **Generate**
- Once generated, click **Download V2C File**

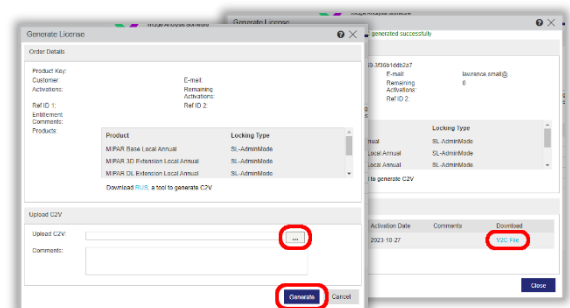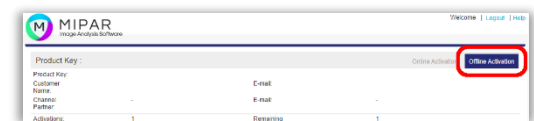

Activate License Key

- If necessary, return to the license server system
- Go to your License Manager's [Activation Page](#)
- Click **Select File...** and choose the V2C file from above
- Click **Apply File**. Your license key is now activated!

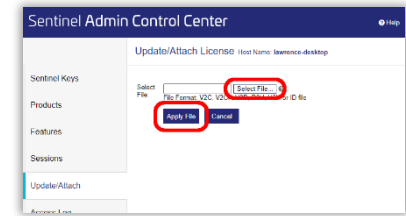


3 Configure Network Access

- Go to your License Manager's [Configuration Page](#)

Allow Access from Remote Clients

- Click the [Access from Remote Clients](#) tab
- Select an **Allow Access from Remote Clients** option
- Make sure **Network Visibility** (on the [Network](#) tab) is set to **All Network Adapters**
- Click **Submit** to apply any changes

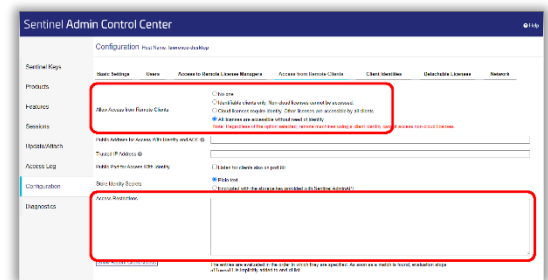

Define firewall rules (if necessary)

- In your firewall, enable access to port 1947

Access Restrictions (optional)

- Click the [Access from Remote Clients](#) tab
- Define the restrictions that will be imposed on remote machines accessing this License Server. Enter data in the following formats:

allow=[item] and/or deny=[item], where "item" is an IP address or machine name. The value of "item" can also be "all" or "none". Each entry must be on a separate line. The entries are evaluated in the order in which they are specified.

For example, "item" can be:

- 10.24.2.18 a single address
- 10.24.2.10-50 range of addresses (only 4th number may be a range)
- 10.24.2.* class C subnet
- 10.24.*.* class B subnet
- 10.*.*.* class A subnet
- 10.24.2.0/24 subnet, number of mask bits specified

- Click **Submit** to apply any changes