

MIPAR™

VM Network License Activation Instructions

SERVER SIDE

1 Start License Manager


- Launch an administrative Command Prompt or PowerShell
- Run `haspdinst -i` command (MIPAR_Network_LicensePack\For_License_Manager)

2 Create System Fingerprint

- If you **HAVE NOT** setup MIPAR on this system
 - Go to your [Key Management Page](#)
 - Click the **C2V** button in the empty row to download your fingerprint C2V file
- If you **HAVE** setup MIPAR on this system
 - Launch **MIPAR**
 - If Activation Window does not appear, go to Help > Activate License from any app
 - Click **Local**, then click **Save Fingerprint** and follow the prompts to save C2V file


3 Download License Key

- Go to the [License Key Download Page](#)
- Enter your emailed **Product Key** – click **Login**
- Click **Offline Activation** in the top right corner
- Click the “...” button next to “Upload C2V”
- Choose the C2V file you created
- Click **Generate**
- Once generated, click **Download V2C File**

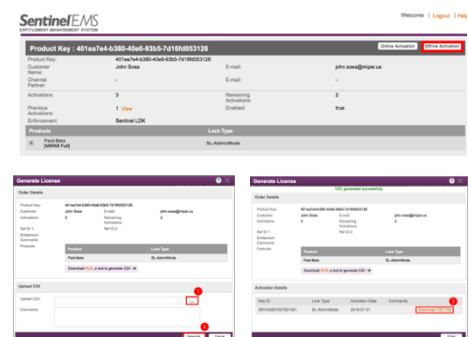

4 Activate License Key

- Go to your License Manager's [Activation Page](#)
- Click **Choose File** and choose the V2C file
- Click **Apply File**. Your license key is now activated!

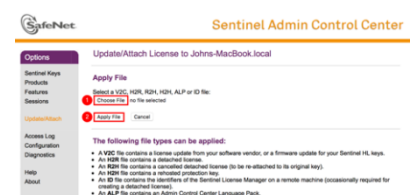


5

Configure Network Access

- Click **Configuration** on the left sidebar

Allow Access from Remote Clients

- Click the **Access from Remote Clients** tab
- Check **Allow Access from Remote Clients**
- Make sure **Network Visibility** (on the **Network** tab) is set to **All Network Adapters**
- Click **Submit** to apply any changes



Access Restrictions (optional)

- Click the **Access from Remote Clients** tab
- Define the restrictions that will be imposed on remote machines accessing this License Server. Enter data in the following format:

allow=[item] and/or deny=[item],
where item is an IP address or
machine name. IP addresses can

include "*" or a range of addresses allow or deny multiple addresses. The value of item can also be all or none. Each entry must be on a separate line. The entries are evaluated in the order in which they are specified.

For example, item can be:

10.24.2.18 a single address

10.24.2.10-50 range of addresses (only 4th number may be a range)


10.24.2.* class C subnet

10.24.*.* class B subnet

10.*.*.* class A subnet

10.24.2.0/24 subnet, number of mask bits specified

- Click **Submit** to apply any changes

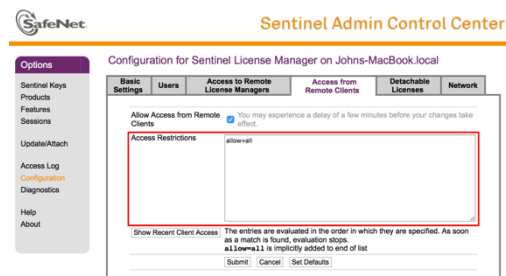

We thank you sincerely for being a MIPAR user!

Please [email us](#) with any needs or questions.